




Do you run a small business and are you looking for better communication solutions? Chose IP PBX Slican IPS-08. It is user-friendly, compact IP PBX with great potential. With built-in GSM gateway and VoIP is ideal for small businesses that require innovative solutions in their daily work.

It is compatible with other Slican products. IPS-08 is a stable and convenient option. The optimal technical parameters, small size, easiness of connection to the network, the ability to automatically reconfigure, friendly administration system Slican ConfigMAN makes it the perfect solution for many users.

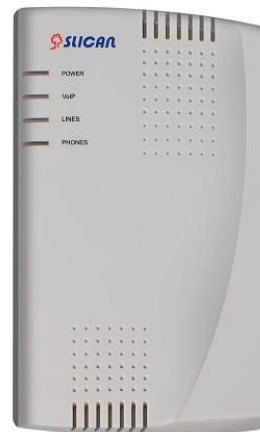

IP PBX IPS-08



INTEGRATION

The latest generation of Slican CTI Communicator provides complete and quick communication and supports teamwork. Applications designed for versatility and accessibility of multiple devices: PC, desk phone and smartphones – which supports "select and click" function. In addition open protocols like CTIP, XML, HTTP, HOTELP, TAPI allow integration of IP PBX IPS-08 with third-party applications.



COST CONTROL

Online support allows you to apply cost saving policy for your company, associated with programming and PBX service. LCR (Least Cost Routing) solution, billing applications, ensure the lowest bills and cost control. Slican WebCTI allows the department manager to identify and assign limits on calls for every employee.



WORK ORGANIZATION

Interaction with door phones enables the company to better organize work. The small size of server, the ease of connecting to the network, the ability to automatically reconfigure and friendly administration system Slican ConfigMAN cause the server Slican IPS-08 is an effective solution for many users.



		IPS-08.104
Maximal capacity	Analogue ports AB (FXS)	2
	IP channels	2
	IP trunks (SIP)	8
	IP subscribers (SIP)	8
	GSM trunks (2G)	1
	CTS IP system ports	8
	SN / RL ports	1/1
	Phone book	1000
Available devices	Slican IP system phones ¹	
	VoIP phones (SIP)	
	Analog phones	
	hot line Slican phone HLP-22	
	Slican consoles	
	Slican DPH series door phones	
	Multi Switch Box (MSB-1102) and Multi Audio Box (MAB-1101)	
Applications supporting IPS-08	Slican CTI Communicator - MessengerCTI and WebCTI	
	Slican BillingMAN / BillingMAN.plus	
	Slican ConfigMAN.admin / ConfigMAN.user	
VoIP parameters	Supported protocols	SIP 2.0, codecs: G.711a, G.711 μ
	Working mode	VoIP master or / and slave
Protocols	Voice communication protocols	POTS / SIP 2.0 / 1800 / 1900
	Server communication protocols	CTIP / HOTELP / TAPI / HTTP / XML
Port Ethernet 10 / 100		1
Power supply		~230 V;50 Hz; < 15 VA (external PS 12 V / 1,2A)
Dimensions (mm) height x width x depth		191 x 111 x 36
Weight		300 g

¹CTS-202.IP system phone does not work with IPS, CTS-330.IP need PBX firmware 6.20 or higher, for bluetooth version need 6.30 firmware version or higher

The presented material is for information purposes. In order to properly configure of PBX, we recommend contact and consultation with Slican Distributor / Reseller.